


WHEELED FILTER GROUP FOR DIESEL "MecFilter"



Ref.	Descrip.	Flow rate	Voltage	Power	Conn. hose	Inlet-Outlet	Nozzle	Weight	Packaging
	MecFilter	l/min	AC V./Hz DC Volt	W	Ø mm / L m	BSPG		kg	mm

090-6000-230	Diesel Filter	60	230/50	460	20 / 4	F 1" - F 1"	Manual	45,00	530X520X1110
090-6000-115	Diesel Filter	60	115/60	575	20 / 4	F 1" - F 1"	Manual	46,00	530X520X1110
090-6000-012	Diesel Filter	60	12	336	20 / 4	F 1" - F 1"	Manual	45,00	530X520X1110

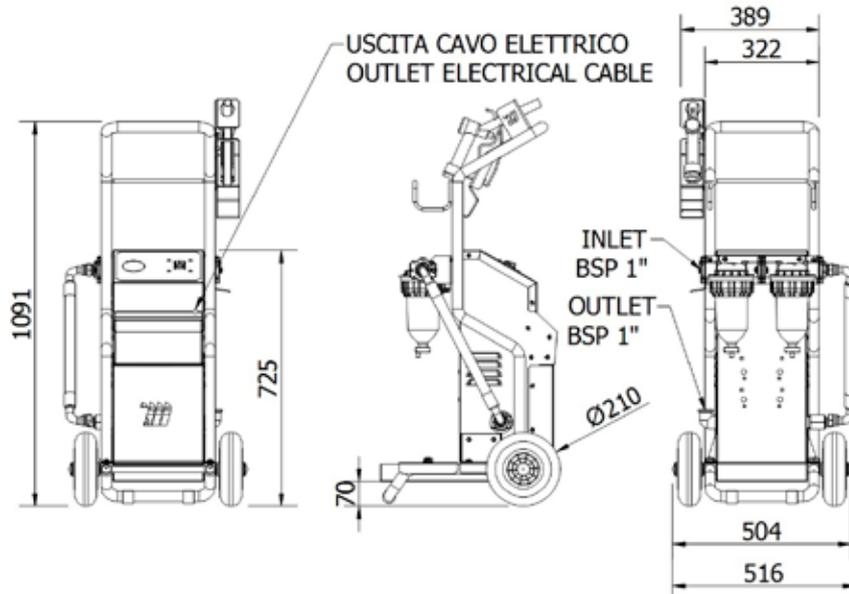

Filter group with double filtering for oil and diesel absorbing water and impurities. The high efficiency allows the filtering of large quantity of diesel in a single operation. The first stage with filtering capacity equal to a 125 μ , second stage with filtering capacity equal to 30 μ with water separating. Group equipped with delivery hose and suction hose. Big diameter wheels suitable for moving on every ground, solid structure in painted tubular.

“MecFilter” series composed by:



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m lenght)
with pincers and fuse - 60 l/min



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1” 4 m lenght



Art. 095-5450-040 Suction kit with PVC hose



Art. 093-5200-000 Aluminium manual nozzle MC80 Flow rate 80 l/min



Art. 094-5250-030 Water separating delivery filter for diesel 30 μ - 70 l/min



Art. 094-5251-030 Cartridge for water separating delivery filter for diesel 30 μ



Art. 094-5255-125 Delivery filter with stainless steel cartridge for diesel 125 μ - 100 l/min